



Specifications

	Low	Med	High	Turbo	Strobe/SOS/ Beacon	Flood Light	Red/ Blue Blinks	Red/ Blue Constant
☀ Output	30 LM	200 LM	650-350 LM	1300-350 LM	650 LM	100 LM	/	/
🕒 Runtime	40H	7H	2Min+ 4H 30Min	1Min+ 4H 30Min	4H /4H /8H	4H 30Min	96H	48H
📏 Distance	158m (Max)							
🌐 Intensity	6250cd (Max)							
✅ Impact Resistant	1m							
🌧 Waterproof	IPX-4							
💡 Light Source	High-performance LED + Red & Blue LED							
⚡ Power	10.5W (Max)							
🔋 Battery	1 x 18650 Li-ion							
📏 Size	25 x 23.5 x 130mm							
⚖ Net Weight	Approx. 83g (excluding headband and battery)							

Notice: The above-approximated parameters are lab-tested by using a 3.7V/ 3000mAh 18650 Li-ion battery. It may vary due to the difference between the environment and batteries. The runtime for High and Turbo mode is accumulated due to the over-heat protection setting.

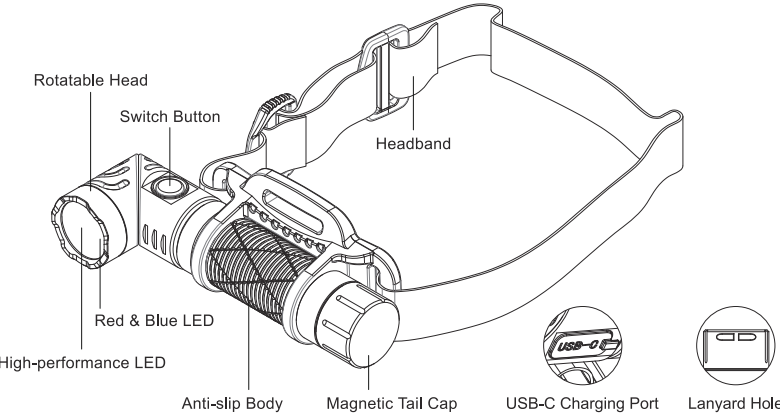

The Light Head Can Be Turned 90° For Versatile Lighting Angles

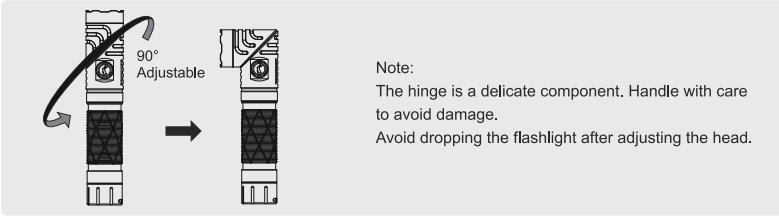

Operation Instructions

General Mode: Low - Medium - High (with mode memory function)
Blinking Mode: Strobe - SOS - Beacon
Colored Light Mode: Red Steady - Red Flashing - Blue Steady - Blue Flashing - Red/Blue Police Flash

- 1 Power On/Off:** Single-click the switch.
- 2 Brightness Adjustment:** Long press the switch while the light is on to adjust brightness; release to select the desired level.
- 3 Turbo Mode:** Double-click the switch while the light is on.
- 4 Strobe Mode:** Triple-click the switch to enter strobe mode; triple-click again to cycle through (Strobe - SOS - Beacon).
- 5 Lockout Mode:**
 - a. While off, quadruple-click the switch to lock.
 - b. In lockout mode, pressing the switch will momentarily activate Low mode, which turns off upon release.
 - c. To unlock, quadruple-click the switch again or loosen the battery cap to cut off the electricity.
- 6 Button Locator Light:** While off, click the switch seven times to turn the locator light On/ Off.
- 7 Floodlight White Mode:** While off, double-click the switch to activate white flood light.
- 8 Red & Blue Lights:** While off, press and hold the switch to enter red/blue police flash mode; single-click to cycle through colored light modes.
- 9 Battery Indicator:**
 - a. Green light: Sufficient power.
 - b. Red light: Low battery warning.

Intelligent Mode Memory Function

The flashlight memorizes and recall the last used general output level when turning on again, excluding the blinking and colored light modes.

USB-C Charging

- Rechargeable via a built-in USB-C charging port.
- Overcharge protection prevents battery damage from overcharging.
- The indicator is color red in charging progress, and turns green when it is fully charged.
- The charging indicator is red during charging and turns green once fully charged.
- After charging, ensure the rubber cover is sealed to maintain the waterproof performance.

Multiple Protection Functions

- **Overcharge Protection:** Prevent battery damage from EXCESSIVE charging.
- **Over-Discharge Protection:** Prevent deep discharge that could harm or damage the battery.
- **Reverse Polarity Protection:** Protects the flashlight from incorrect battery installation.
- **Overheat Protection:** When the flashlight's temperature is high, it will automatically reduce the output to prevent overheating and ensure comfortable use.
- **Low Voltage Protection:** When the voltage is low, the flashlight reduce output and eventually shut down automatically.

Low Power Reminder

When the battery voltage is low, the lamp will blink as a reminder. In this case, please replace or recharge the battery promptly.

Battery Usage

- The flashlight operates on one 18650 Lithium-Ion battery.
- Recharge the battery promptly when the flashlight dims.
- Replace the battery if it is damaged or at the end of its lifespan.
- It is recommended to use batteries from Lumintop or other reputable.
- Battery Installation: Ensure the positive terminal (+) is facing the flashlight head.

Safety and Warnings

- 1) Battery Warning: Contains battery. No disassembly, heating above 100℃, or burning.
- 2) Choking Hazard: Contains small parts. Not suitable for children under 3 years old.
- 3) Eye Safety: Do not shine the lamp directly into the eyes to avoid vision damage.
- 4) Storage Precautions: If the flashlight will not be used for a long time, remove the battery to prevent leakage or damage.

ENVIRONMENTAL DISPOSAL INSTRUCTIONS


Information (for private households) about the environmentally sound disposal of electrical and electronic equipment in accordance with the WEEE directive (Waste Electrical and Electronic Equipment).



This symbol on electrical and electronic products and the documentation that accompanies them indicates that these products may not be discarded together with ordinary household waste. Instead the products must be taken to a designated collection point where they will be received free of charge for disposal, treatment, reuse and recycling as appropriate. In certain countries products may also be returned to the point of sale when purchasing an equivalent new product. By disposing of this product in the proper manner you are helping to save valuable natural resources and to eliminate the negative effects that the irresponsible disposal and management of waste can have on health and the environment. Please contact the relevant authorities where you live for information about your nearest WEEE collection point. Disposing of this type of waste in an unapproved manner may render you liable to fine or other penalty according to the law.

Warranty


1. 30 days of purchase: Free repair or replacement with manu-facturing defects.
2. 5 years of purchase: Lumintop will repair the products free of charge within 5 years of purchase (products with built-in battery 2 years, charger, battery 1 year) if problems develop with normal use.
3. Lifetime warranty: If repair is required after the guaranty period, we' ll charge for parts accordingly.
4. This warranty does not cover normal wear and tear, improper maintenance, abuse, force majeure damage, or defaults by human factors.

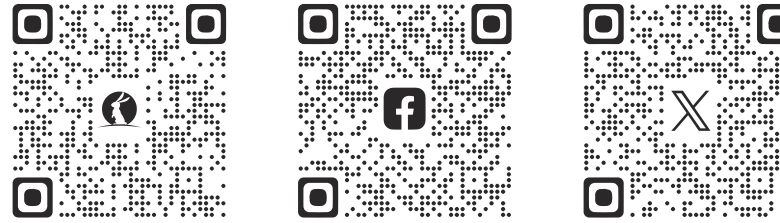

Made in China
LUMINTOP TECHNOLOGY CO., LTD
Address: 7th Fl, Zhichuang Industrial Bldg,
No. 1 Baoqing Rd, Baolong St., Longgang Dist.,
Shenzhen, Guangdong, China. 518116

Web: www.lumintop.com
Tel: +86-755-88838666
E-mail: service@lumintop.com

EU	REP	EUBRIDGE ADVISORY GMBH Virginia Str. 2 35510 Butzbach, Germany 49-68196989045 eubridge@outlook.com
UK	REP	TANMET INT'L BUSINESS LTD 9 Pantygraigwen Road, Pontypridd, Mid Glamorgan, CF37 2RR, UK tanmetbiz@outlook.com

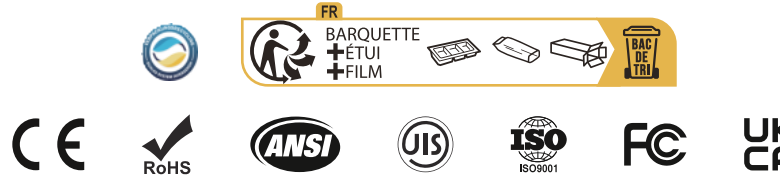


使用说明书
User Manual


技术参数

	低亮	中亮	高亮	极亮	爆闪/ SOS/ 信标	泛光	红/蓝闪	红/蓝常亮
亮度	30 流明	200 流明	650-350 流明	1300-350 流明	650 流明	100 流明	/	/
续航	40小时	7小时	2分+ 4小时30分	1分+4小时 30分	4小时/4小时/ 8小时	4小时30分	96小时	48小时
射程	158米（Max）							
光强	6250坎德拉（Max）							
防跌落高度	1米							
防水等级	IPX-4							
光源	高性能LED灯珠+ 红蓝LED							
功率	10.5W（Max）							
使用电池	1 X 18650锂离子电池							
尺寸	25 X 23.5 X 130毫米							
净重	约83克（不含头灯带和电池）							

注：上述近似参数为使用1节3.7V/3000mAh 18650锂离子电池在实验室测试所得，可能会随电池及测试环境不同而变化。由于温控保护设置，高亮、极亮档续航为累加值。

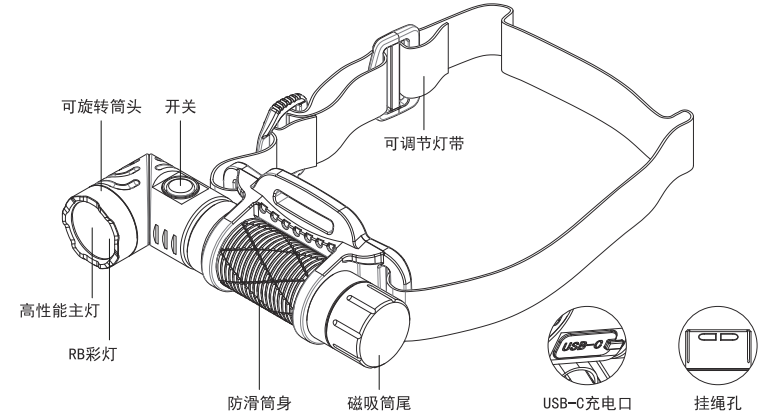

灯头旋转示意图

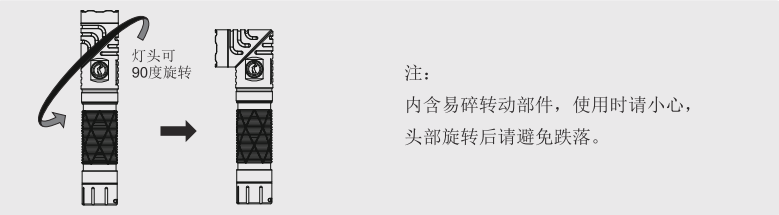

操作说明

常规模式：低亮-中亮-高亮 （带档位记忆功能）

闪烁模式：爆闪-SOS-信标

彩灯模式：红灯常亮-红灯闪烁-蓝灯常亮-蓝灯闪烁-红蓝警闪

1 开/关机：单击开关。

2 调光：开机状态下长按开关调光，松开按键选定档位。

3 极亮：开机状态下双击开关。

4 闪烁模式：三击开关进入爆闪，再次三击切换模式（爆闪-SOS-信标）。

5 锁定模式：关机状态下四击开关锁定，锁定时按压开关可瞬时点亮低亮，松手即灭。再次四击开关或拧松螺纹断电可解锁。

6 按键方位灯：关机状态下，七击开关开启或关闭方位灯。

7 泛光白灯：关机状态下双击开关。

8 红蓝灯：关机状态下长按开关进入红蓝警闪，单击开关切换彩灯模式。

9 电量指示：电量正常时绿灯亮，电量不足时红灯亮。

智能记忆模式

手电关闭，当再次打开时会记忆并恢复上一次使用时的常规亮度档位，闪烁模式和彩灯模式除外。

USB-C充电

1）内置Type-C充电口，不分正反，充电方便快捷。

2）内置防过充保护，防止过度充电损坏电池和手电。

3）电量指示灯：电量正常时为绿灯，电量不足时亮红灯。

4）充电时，指示灯为红色，充满为绿色。

5）充电完成后，请将硅胶塞放回以确保防水性能。

电池使用

• 本手电使用1节18650锂离子电池。

• 当手电亮度降低时请及时给电池进行充电。

• 当电池损坏或将达到寿命时，请及时更换电池，推荐使用Lumintop厂家电池或信誉良好的电池，并确保电池正极朝向筒头方向。

多重保护功能

• 防过充保护，防止过度充电损坏电池。

• 防过放保护，防止过度放电损坏电池。

• 防反接保护，防止电池反装短路损坏手电及电池。

• 温控保护，手电配备有温度保护和时间保护功能，温度过高时手电会自动降低亮度以达到热平衡。

• 低电保护，当锂电池电压降低电量不足时，指示灯会闪烁提醒，手电筒会自动降档降低亮度，直到自动关机保护。

安全警告

1) 电池警告：内含电池。禁止拆卸、加热至100℃以上或燃烧。

2) 窒息警告：内含小部件。不适合3岁以下儿童。

3) 请勿将灯具直接照射人眼睛，以免损伤视力。

4) 如长时间不使用，请将电池取出，以防止电池漏液损坏手电。

5) 此灯具的光源是不可替换的；当光源到其寿终时，应替换整个灯具。

保修条款

1. 30 天包换期：自产品售出之日起 30 天内，在正常使用情况下，出现产品质量问题，客户可选择换货或者保修服务。更换时，所换产品应为返修产品同型号同规格产品；如已停产的，则更换不低于原产品性能的同品牌产品。

2. 5年保修：自产品售出之日起5年内，用户在正常使用情况下，出现产品质量问题，则享受保修服务（内置不可拆卸电池的照明产品2年，充电器等配件1年）。

3. 终身有偿保修：超过产品免费保修期的，Lumintop将提供永久有偿保修，费用以实际更换材料为准，运费自理，不收取人工费用。

4. 以下情况不适用免费保修范围：因正常磨损而造成缺陷的；由于粗暴操作而造成缺陷的；不可抗拒力造成损坏的；其他人为因素造成产品问题的。



中国制造
执行标准：GB/T35590-2017
生产地址：深圳市龙岗区宝龙街道宝清路1号智创产业大厦7层

深圳市雷明宇光电有限公司
官网：www.lumintop.com
电话：0755-88838666

